




YUKON N Series

Half-Cell N-Type Bifacial Module


620-640Wp | **22.90%**
Module Power Output | Max Efficiency

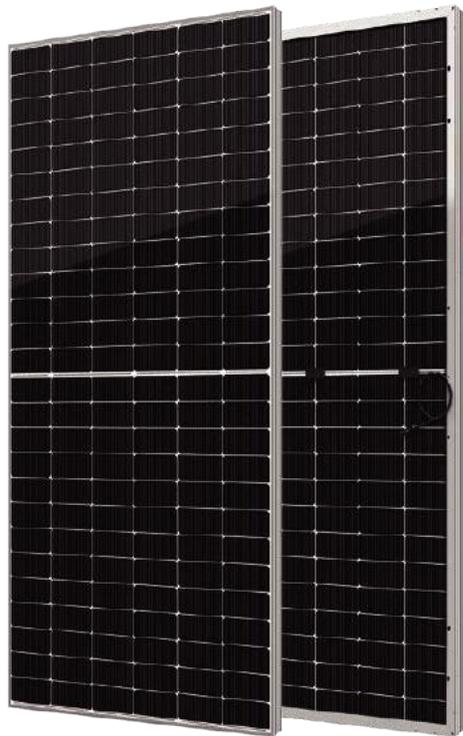

Key Features

-  High module conversion efficiency
-  Better temperature coefficient
-  Super multi busbar technology
-  Low attenuation long warranty
-  Superior load capacity
-  Higher bifaciality
-  USA based liability insurance
-  Houston, Texas based company

Warranty

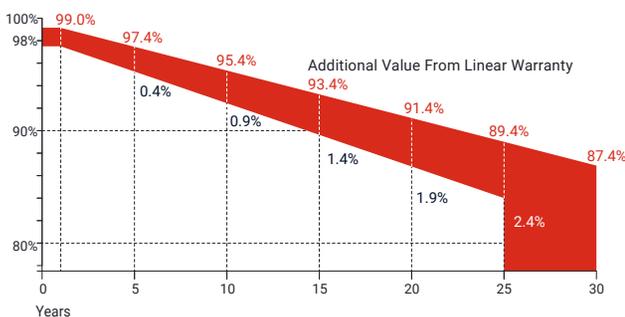

15 Years Guarantee on product material and workmanship

30 Years Linear power output warranty

Product Certification

IEC61215; IEC61730; UL61215; UL61730	
IEC62804	PID
IEC61701	Salt Mist
IEC62716	Ammonia Resistance
IEC60068	Dust and Sand
IEC61215	Hailstone
Fire Type (UL61730): Type 29	
ISO14001:2015; ISO9001:2015; ISO45001:2018	
	
	
	
	

About SEG Solar

Founded in 2016, SEG is a leading vertically integrated PV manufacturer headquartered in Houston, Texas, U.S., and is dedicated to delivering reliable and cost-effective solar modules to the utility, commercial, and residential markets. By the end of 2024, SEG had shipped over 6 GW of solar modules worldwide and have achieved a module production capacity of 6 GW.



Download Datasheet

Electrical Characteristics

Module Type	SEG-620-BTZ-BG			SEG-625-BTZ-BG			SEG-630-BTZ-BG			SEG-635-BTZ-BG			SEG-640-BTZ-BG		
	STC	NOCT	BNPI												
Maximum Power -Pmp(Wp)*	620	467	687	625	471	693	630	475	698	635	479	704	640	483	709
Open Circuit Voltage -Voc(V)	56.82	53.97	56.82	56.95	54.10	56.95	57.08	54.22	57.08	57.21	54.34	57.21	57.34	54.46	57.34
Short Circuit Current -Isc(A)	13.74	11.08	15.22	13.80	11.14	15.29	13.86	11.19	15.36	13.92	11.24	15.42	13.98	11.29	15.49
Maximum Power Voltage -Vmp(V)	47.37	44.54	47.37	47.54	44.69	47.54	47.70	44.83	47.70	47.86	45.02	47.86	48.02	45.18	48.02
Maximum Power Current -Imp(A)	13.09	10.49	14.50	13.15	10.54	14.57	13.21	10.59	14.64	13.27	10.64	14.70	13.33	10.69	14.77
Module Efficiency(%)	22.18			22.36			22.54			22.72			22.90		
Power Tolerance(W)							(0, +4.99)								
Maximum System Voltage							1500V DC								
Maximum Series Fuse Rating							30 A								
Bifaciality							80±10%								

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² ambient temperature 20°C module temperature 45°C wind speed: 1m/s

*Measuring tolerance: ±3%




BNPI: Front irradiance 1000W/m², Rear irradiance 135W/m²

Mechanical Specifications

External Dimension	2465 x 1134 x 30 mm
Weight	34.0 kg
Solar Cells	N-Type Mono-crystalline 156 pcs(78 x 2)
Front Glass	2.0 mm AR coating heat strengthened glass
Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	MC4 or others
Cable Type	12 AWG PV Wire(UL)
Cable Length	400 mm(+), 200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

*Refer to SEG installation manual for details

Technical Drawing

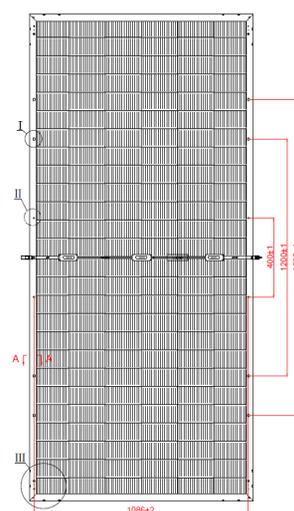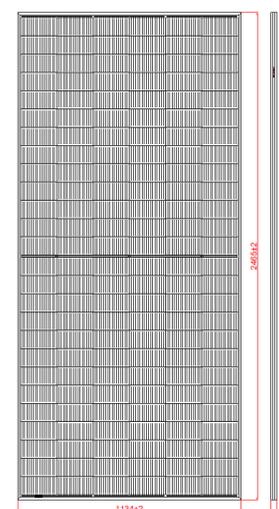

Temperature Characteristics


Pmax Temperature Coefficient	-0.30 %/°C
Voc Temperature Coefficient	-0.25 %/°C
Isc Temperature Coefficient	+0.046 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

Container*	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	4	16
Pieces per Container	144	576

*Refer to the SEG container technical documentation for 53' box trailer or other trucks loading quantity

Curves of PV Module

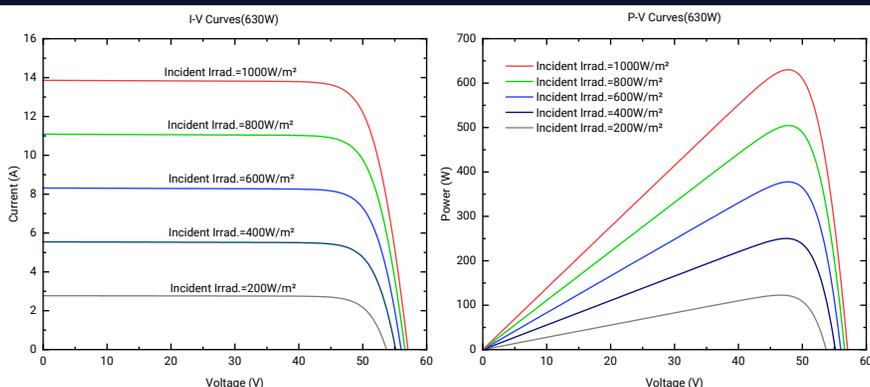

*Refer to SEG installation manual for details