


SIERRA N Series

Half-Cell HJT Bifacial Module

720-740W_p
Module Power Output

23.82%
Max Efficiency

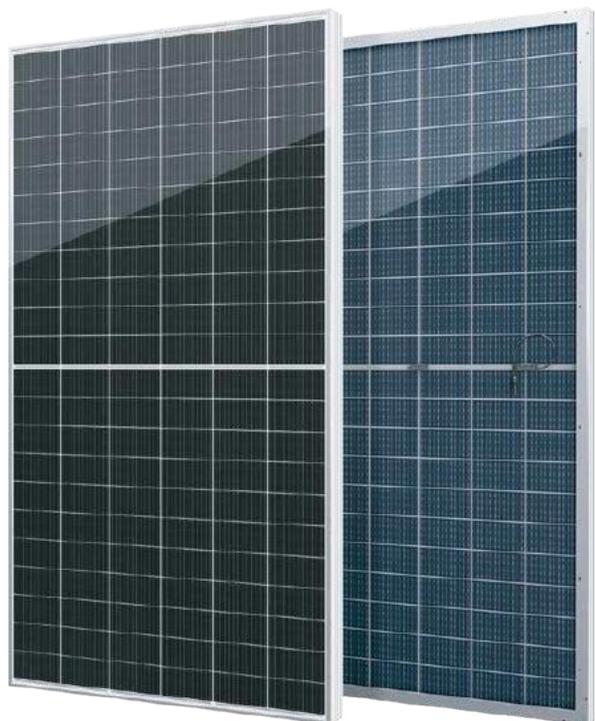

Key Features



High module conversion efficiency



Better temperature coefficient



Super multi busbar technology



Low attenuation long warranty



Superior load capacity



Higher bifaciality




USA based liability insurance



Houston, Texas based company

Warranty

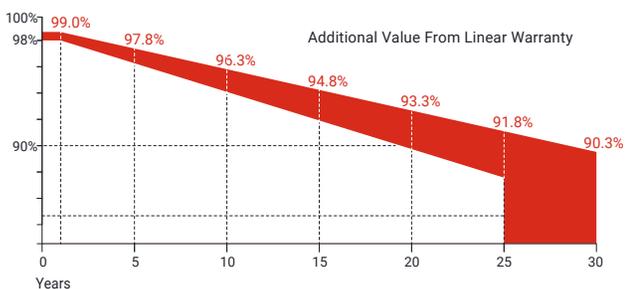

15
Years
Guarantee on product material and workmanship

30
Years
Linear power output warranty

Product Certification

IEC61215; IEC61730; UL61215; UL61730

IEC62804

PID

IEC61701

Salt Mist

IEC62716

Ammonia Resistance

IEC60068

Dust and Sand

IEC61215

Hailstone

Fire Type (UL61730): Type 29

ISO14001:2015; ISO9001:2015; ISO45001:2018



About SEG Solar

Founded in 2016, SEG is a leading vertically integrated PV manufacturer headquartered in Houston, Texas, U.S., and is dedicated to delivering reliable and cost-effective solar modules to the utility, commercial, and residential markets. By the end of 2024, SEG had shipped over 6 GW of solar modules worldwide and have achieved a module production capacity of 6 GW.



Download Datasheet

Electrical Characteristics

Module Type	SEG-720-BHC-BG			SEG-725-BHC-BG			SEG-730-BHC-BG			SEG-735-BHC-BG			SEG-740-BHC-BG		
	STC	NOCT	BNPI												
Maximum Power -Pmp(Wp)*	720	549	807	725	553	813	730	557	819	735	561	824	740	565	830
Open Circuit Voltage -Voc(V)	50.17	47.88	50.17	50.27	47.98	50.27	50.37	48.08	50.37	50.47	48.17	50.47	50.57	48.27	50.57
Short Circuit Current -Isc(A)	18.17	14.51	20.38	18.26	14.59	20.48	18.35	14.67	20.58	18.44	14.74	20.68	18.53	14.81	20.78
Maximum Power Voltage -Vmp(V)	42.14	40.16	42.14	42.23	40.32	42.23	42.32	40.41	42.32	42.41	40.50	42.41	42.50	40.58	42.50
Maximum Power Current -Imp(A)	17.10	13.67	19.18	17.18	13.73	19.27	17.26	13.79	19.36	17.34	13.86	19.45	17.42	13.92	19.54
Module Efficiency(%)	23.18			23.34			23.50			23.66			23.82		
Power Tolerance(W)							(0, +4.99)								
Maximum System Voltage							1500V DC								
Maximum Series Fuse Rating							35 A								
Bifaciality							90±5%								

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² ambient temperature 20°C module temperature 45°C wind speed: 1m/s

*Measuring tolerance: ±3%




BNPI: Front irradiance 1000W/m², Rear irradiance 135W/m²

Mechanical Specifications

External Dimension	2384 x 1303 x 33 mm
Weight	38.5 kg
Solar Cells	HJT Mono-crystalline 132 pcs(66 x 2)
Front Glass	2.0 mm AR coating heat strengthened glass
Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	MC4 or others
Cable Type	12 AWG PV Wire(UL)
Cable Length	400 mm(+), 200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

*Refer to SEG installation manual for details

Technical Drawing

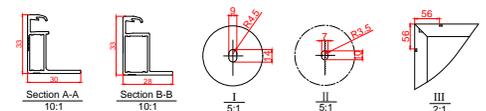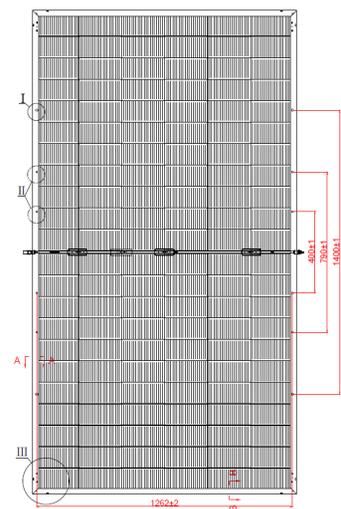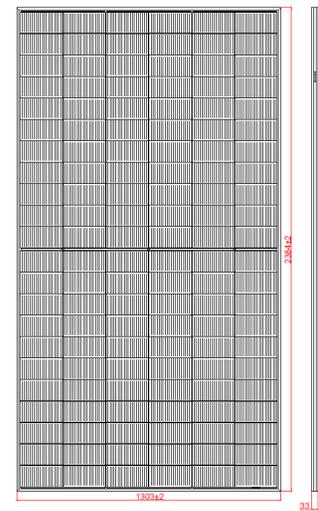

*Refer to SEG installation manual for details

Temperature Characteristics

Pmax Temperature Coefficient	-0.24 %/°C
Voc Temperature Coefficient	-0.22 %/°C
Isc Temperature Coefficient	+0.04 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

Container*	40'HQ
Pieces per Pallet	31
Pallets per Container	18
Pieces per Container	558

*Refer to the SEG container technical documentation for 53' box trailer or other trucks loading quantity

Curves of PV Module

